


# Wings

Instructions by Kristina Tollefson [www.tollefsondesigns.com](http://www.tollefsondesigns.com)

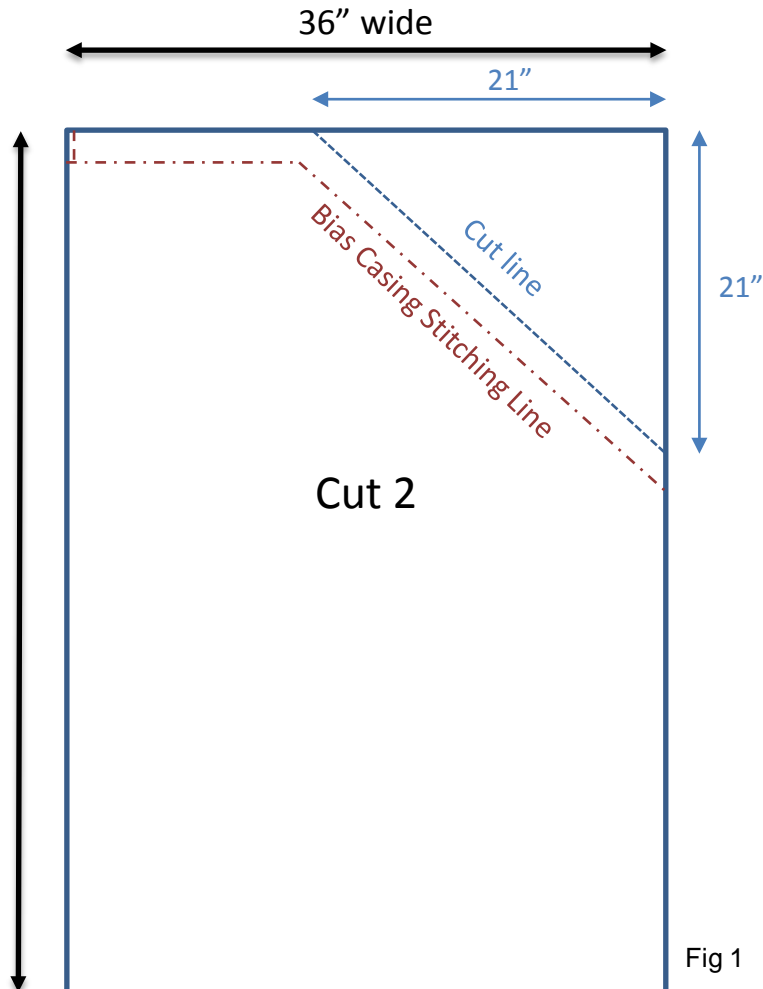

- Purchase 36" wide white muslin. You can use the selvage edge as the finished edges of the wing and tunic sides. If your fabric is wider you will need to cut it down and finish the edges.
- Cut each wing panel 74" in length, full width of the 36" bolt.
- Trim corner as illustrated in Fig 1.
- Create bias casing bias casing for PVC pocket. 48" plus seam allowance & hem per wing (about 100" per pair of wings)
  - Cut 3" bias strips
  - Press under one long edge ½"
  - Line up un-pressed side of bias along cut raw edge of wing and stitch along bias casing stitching line
  - Press and turn to wrong side. Top stitch folded edge of bias with all raw edges turned to inside. Pleat at corner.
  - Stitch short end closed as close to end as possible so wing pipe will not push through. Leave the other end open so the wing can be threaded onto the wing pipe.
- Finish bottom edge with serging or a tiny rolled hem.

# Tunic

Instructions by Kristina Tollefson [www.tollefsondesigns.com](http://www.tollefsondesigns.com)

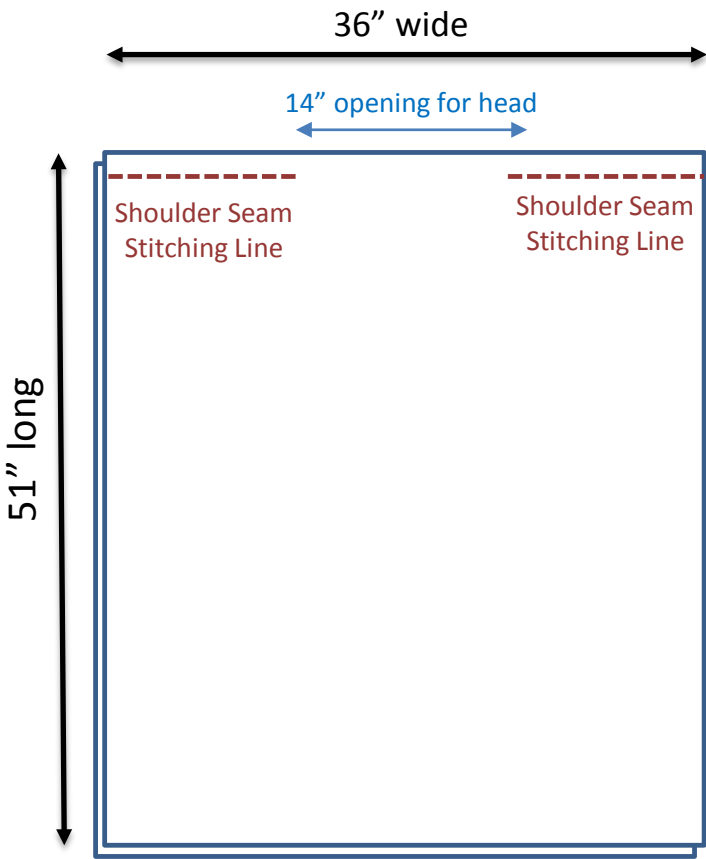


Fig 2

- Use full width of 36" fabric
- Cut two panels 51" long
- Stitch shoulder seams leaving 14" opening for the head to pass through
- Press open
- Turn under raw edges of seam allowance along shoulder seams and top stitch flat, leaving a 14" wide opening at opening as illustrated in Fig. 3
- Finish hems with serger or tiny rolled hem

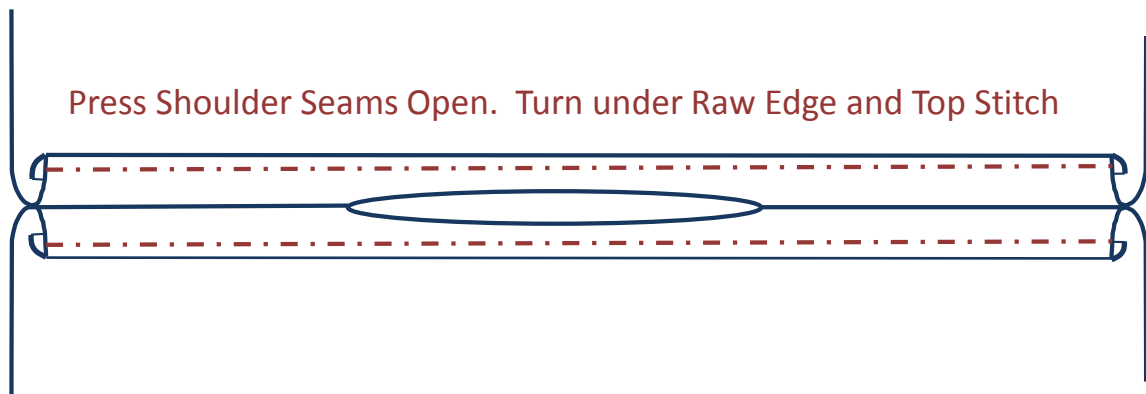


Fig 3